


PRELIMINARY DATASHEET



SQ-SEN-200

FEATURES

- **Omnidirectional** – Senses tilt or vibration movement in any direction.
- **Surface mount (SMT)** – Lead (Pb)-Free, RoHS compliant; Tape and reel packaging.
- **High sensitivity and long life** –99.97% pure gold plating.
- **Miniature size** - Only 3.3 mm by 6.9 mm.
- **Ultra low power** - As little as 0.25 uA continuous.
- **Simple interface** - No signal conditioning required.
- **Quiet** – Undetectable sound level.

APPLICATIONS

- Motion-triggered “wake up” input signal for low power, wireless system.
- GPS, RFID tracking systems, security systems, alarms.

DESCRIPTION

The SQ-SEN-200 series sensor acts like a normally closed switch which chatters open and closed as it is tilted or vibrated. Unlike other ball-tube devices, the 200 is truly an omnidirectional motion sensor. The sensor will produce continuous on-off contact closures when in motion. When at rest, it normally settles in a closed state. It is sensitive to both tilt (static acceleration) and vibration (dynamic acceleration). The sensor can be easily used to produce a series of CMOS or TTL level logic pulses using a single resistor to limit current. This signal can be used to interrupt (wake up) a microcontroller or can be counted to estimate the amount and duration of activity. The sensor is fully passive, requires no signal conditioning, and can be used in a microcontroller interrupt circuit that draws as little as 0.25uA of continuous current.

TABLE 1

	<p>USES:</p> <ol style="list-style-type: none"> 1. Omnidirectional movement sensing. 2. Omnidirectional vibration sensing. 3. Omnidirectional tilt sensing. <p>BEHAVIOR:</p> <ol style="list-style-type: none"> 1. Normally closed when at rest. 2. Chatter open / closed when tilted or vibrated in any direction. <p>PACKAGE:</p> <ol style="list-style-type: none"> 1. MPM-3369 package <p>FUNCTIONAL REPLACEMENT FOR:</p> <ol style="list-style-type: none"> 1. SQ-SEN-003P 2. SQ-SEN-003PS 3. SQ-SEN-003PS-XL
--	---

TABLE OF CONTENTS

Theory Of Operation.....	3
Electrical Characteristics	3
Dimensions	3
Example PCB Landing	4
Product Comparison	5
Ordering Guide	5
Limitations and Warnings	5
Testing	5
System Integration Testing	5
Notice.....	5
Further Information	5
Notes.....	5


THEORY OF OPERATION

The SQ-SEN-200 series sensor acts like a normally closed switch which chatters open and closed as it is tilted or vibrated. Note that the SQ-SEN-200 is not guaranteed to be closed—even when the sensing mechanism is at rest. However, a good rule of thumb is that 75% - 95% of the time (depending on orientation) when the sensor is at rest it will be closed. The engineer should design his or her software to look for high-to-low and low-to-high edge transitions rather than an open of closed state of the switch.


ELECTRICAL CHARACTERISTICS

PARAMETER	MIN	MAX	UNITS
Supply Voltage Range	2.7	12	Vdc
Current Sink*	0.00025	5	mA

* Current consumption is determined by the resistance of the application circuit and the supply voltage.

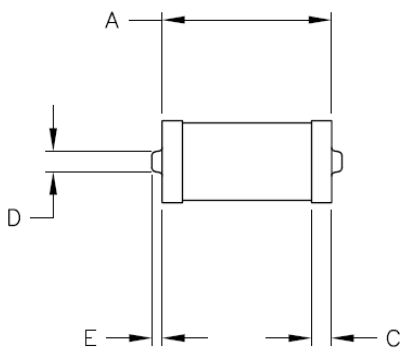DIMENSIONS
PHYSICAL SIZE


SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.9	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1



EXAMPLE PCB LANDING

TYPICAL PCB LANDING			ALTERNATE, PCB CUTOUT LANDING (USE FOR LOWEST PROFILE)		
SYMBOL	DESCRIPTION	MM	SYMBOL	DESCRIPTION	MM
A	Pitch	6.0	A	Recess Length	7.4
B	Pad Length	1.2	B	Pad Length	0.8
C	Pad Width	2.1	C	Pad Width	1.5

***Note:** Alternative layouts may be used to optimize size or manufacturability

PRODUCT COMPARISON

GRADE	ASSEMBLY METHOD	SEALING	WASH TOLERANCE	PB-FREE, ROHS	OPERATING TEMPERATURE
C	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Washable	Yes	0C to + 70C
I	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Washable	Yes	-40C to + 85C

ORDERING GUIDE

PART NUMBER	PACKAGING CODE	COMPLETE ORDER NUMBER
SQ-SEN-200-C	BB - Bulk Bag CT - Cut Tape TR - Tape on Reel	SQ-SEN-200-CBB SQ-SEN-200-CCT SQ-SEN-200-CTR
SQ-SEN-200-I	BB - Bulk Bag CT - Cut Tape TR - Tape on Reel	SQ-SEN-200-IBB SQ-SEN-200-ICT SQ-SEN-200-ITR

LIMITATIONS AND WARNINGS

This product is not designed for use in life support and/or safety equipment where malfunction of the product can reasonably be expected to result in personal injury or death. Buyer uses this product in such applications at Buyer's own risk and agrees to defend, indemnify, and hold harmless SignalQuest, Inc. from any and all damages, claims, suits, or expenses resulting from such misuse.

TESTING

The performance of each sensor is verified through build-time testing.

SYSTEM INTEGRATION TESTING

Thorough testing should be carried out prior to product release to ensure system integration has not introduced unforeseen problems. The system integrator assumes the ultimate responsibility for the safety of the target application.

NOTICE

Information furnished by SignalQuest, Inc is believed to be accurate and reliable. However, this document may contain ERRORS and OMMISIONS. Accordingly, the design engineer should use this document as a reference rather than a strict design guideline and should perform thorough testing of any product that incorporates this or any other SignalQuest product. No responsibility is assumed by SignalQuest, Inc. for this use of this information, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of SignalQuest, Inc. Trademarks and registered trademarks are the property of their respective companies.

FURTHER INFORMATION

For pricing, delivery, and ordering information, please contact SignalQuest at (603) 448-6266
For updates on this and other documents, visit our website at www.signalquest.com

NOTES